

PMS-LLB075-8040M

Professional optical path design, low distortion imaging, uniform distribution of center and edge light.

8K	5μm/7μm	80mm	ϕ64mm	M72/F
Lens Series	Image Size	Focal Length	Max.Sensor Size	

PRODUCT ADVANTAGE:

- Multiple specification options 8K three specifications can be selected;
- Ultra-low distortion;
- Shockproof design;
- Support 8K line scan camera.


APPLICATION FIELDS:

Widely used in machine vision production automation and other fields.

	Parametric		
Max.Sensor Size(mm)	ϕ64		
Image Size	5μm/7μm		
Base Multiplier	0.63×	0.75×	0.9×
Iris Range	4.0~16		
Focal Length (mm)	80		
Distortion	＜0.05%		
Relative Illumination	90%		
Working distance(mm)	190	170	153
Conjugate distance (mm)	365	354	349
Mount	M72/F		
Operating Environment	Temperature-10°C~+50°C; Humidity: 30-80% (no Condensation)		

Dimension Drawing

Unit:mm

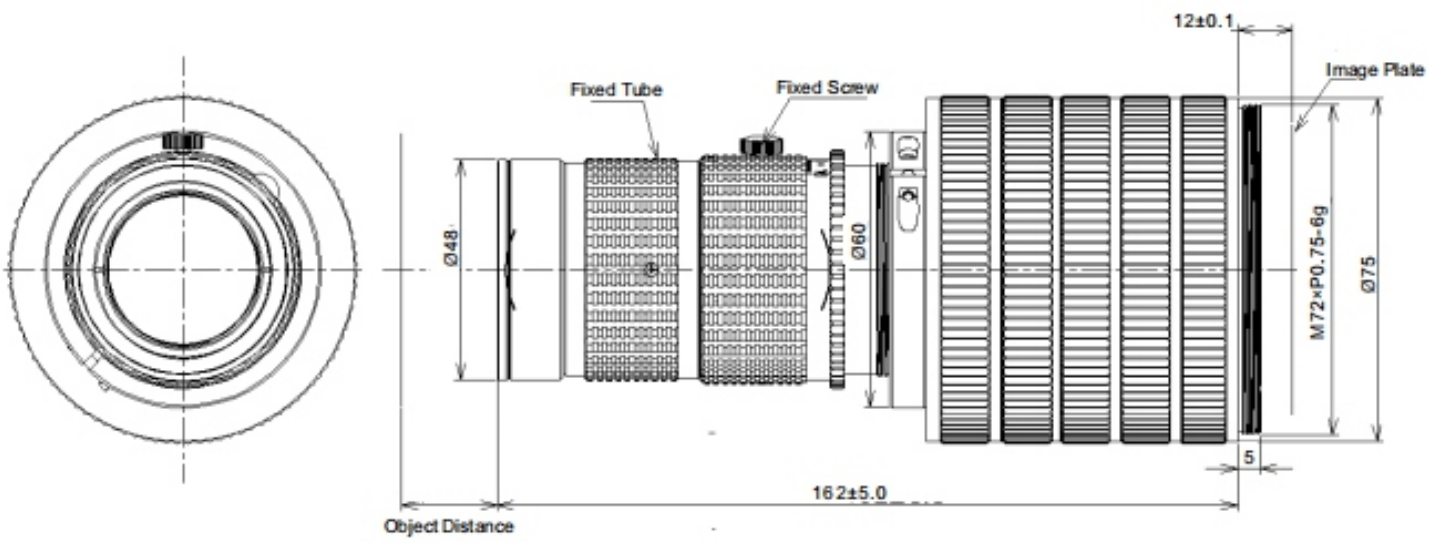

T.86-769-2266 0867 F.86-769-2266 0857 E.markering@pomeas.com
Add: No.68,Chongwei Road,Baizhoubian,East district,Dongguan,China,523000
Add: Building 15#, CIMC Park,High And NewTechnology Industries Development Area,Songshan Lake, Dongguan