

PMS-LLB005-5040M

Professional optical path design, low distortion imaging, uniform distribution of center and edge light.

8K	5μm/7μm	50mm	ϕ62mm	M42/M58/M72/F
Lens Series	Image Size	Focal Length	Max.Sensor Size	

PRODUCT ADVANTAGE:

- Multiple specification options 8K three specifications can be selected;
- Ultra-low distortion;
- Shockproof design;
- Support 8K line scan camera.


APPLICATION FIELDS:

Widely used in machine vision production automation and other fields.

Parametric				Unit: mm
Max.Sensor Size(mm)	ϕ62			
Image Size	5μm/7μm			
Base Multiplier	0.025×	0.05×	0.07×	
Iris Range	4.0~22			
Focal Length (mm)	50			
Distortion	＜0.05%			
Relative Illumination	60%			
Working distance(mm)	2000	1025	735	
Conjugate distance (mm)	2102	1133	839.2	
Mount	M42/M58/M72/F			
Operating Environment	Temperature-10°C~+50°C; Humidity: 30-80% (no Condensation)			

Dimension Drawing

Unit: mm

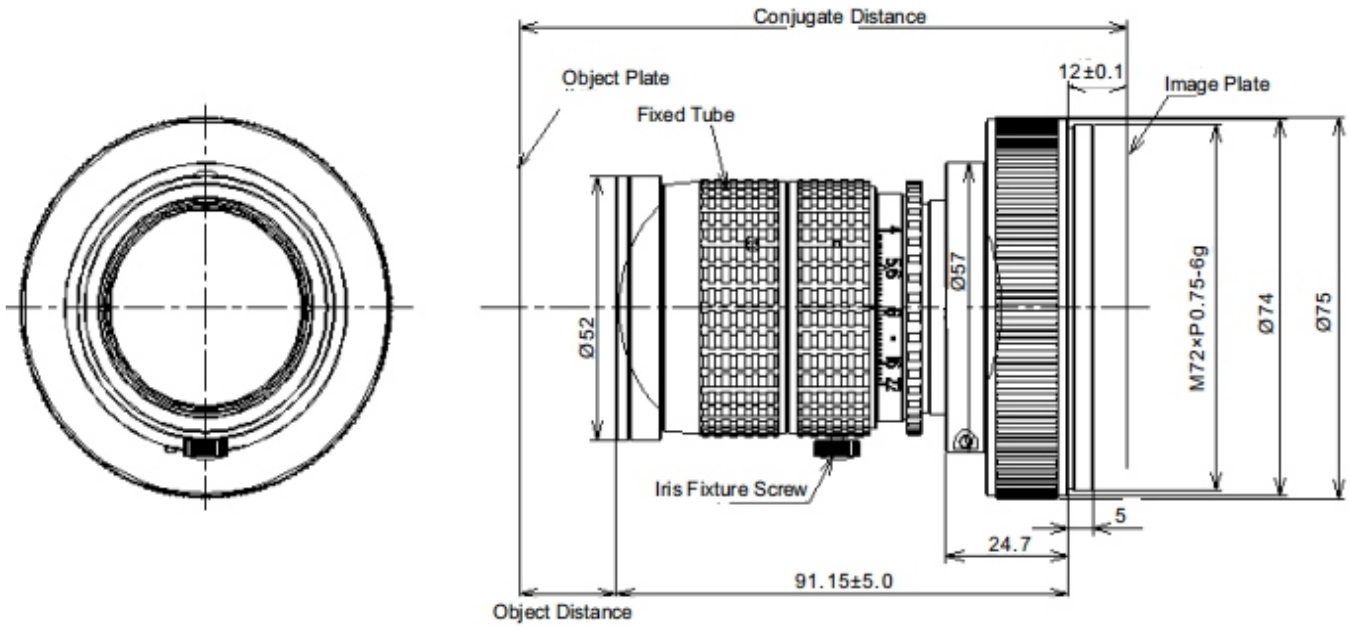

T.86-769-2266 0867 **F**.86-769-2266 0857 **E**.markering@pomeas.com
Add: No.68,Chongwei Road,Baizhoubian,East district,Dongguan,China,523000
Add: Building 15#, CIMC Park,High And NewTechnology Industries Development Area,Songshan Lake, Dongguan