


POINT LIGHT - TECHNICAL DRAWING

Model: PMS-SL30-5V3W

All dimensions in mm unless otherwise specified.

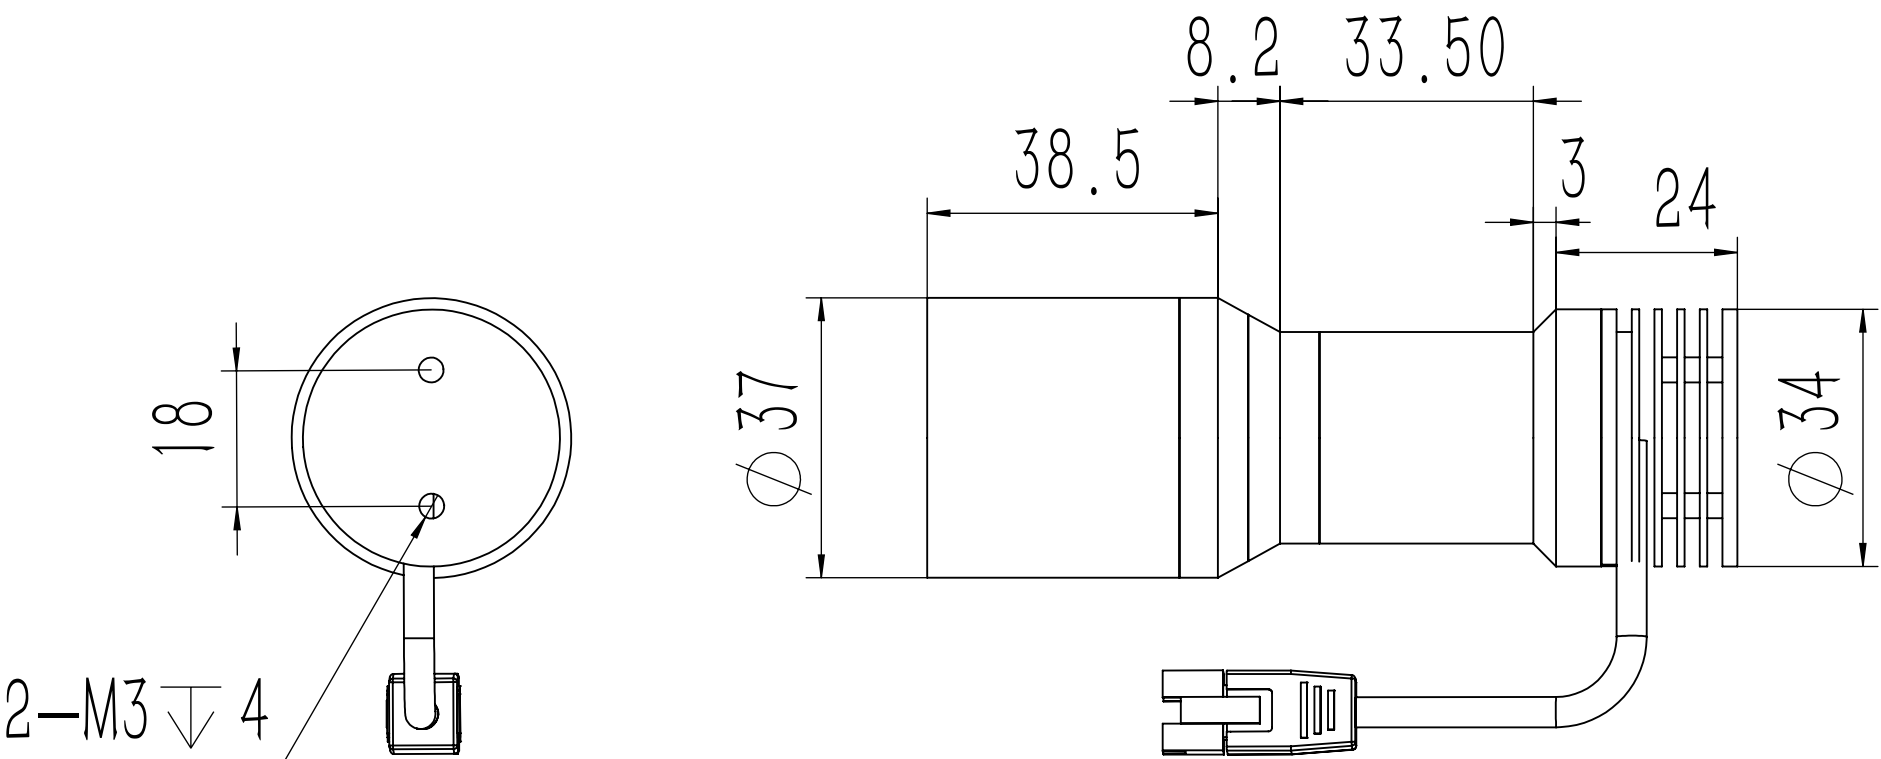

TECHNICAL SPECIFICATIONS	
Connector	SM-3P, 2-pin hollow type
Pin Definition	1: Positive 2: NC 3: Negative
Storage Temperature	-20 to 60 C
Operating Temperature	0 to 40 C
Humidity	20-85% RH, non-condensing
Outline Dimensions	See drawing
Illuminating Area	Dia. 30 mm

Color	CCT / Wavelength	Voltage	Power
Blue	460-475 nm	5 V	3 W
White	6000-7500 K	5 V	3 W
Green	520-530 nm	5 V	3 W
Red	620-630 nm	5 V	3 W

POMEAS PRODUCT DRAWING			
Product	Machine Vision Point Light	Model	PMS-SL30-5V3W
Date	2026-09-07	Unit	mm
POMEAS		Professional Machine Vision Solutions www.pomeas-vision.com	