



PMS-LFHHG-3520M(B)

FA INDUSTRIAL LENS

Professional optical design with low distortion and uniform center-to-edge illumination.

PRODUCT OVERVIEW

- ◆ Supports up to 20MP 1.1-inch cameras
- ◆ Focus and iris locking screws maintain stable settings
- ◆ Low-distortion imaging
- ◆ Compact structure with excellent optical performance


PMS-LFHHG-3520M(B)


PRODUCT SPECIFICATIONS

Image Sensor Size		4/3"(23mm)
Spectral Range		420~1000nm
Focal Length		35mm
Mount		C-Mount
Iris Range		F2.0-F22
Field Angle (D x H x V)	4/3"	36.8°×29.7°×22.5°
	1"	26.0°×20.8°×15.8°
	1/2"	13.2°×10.6°×7.9°
Object Size at MOD (D x H x V)	4/3"	121.0×96.7×72.4mm
	1"	84.0×67.2×50.3mm
	1/2"	42.0×33.5×25.1mm
Back Focal Length (in air)		18mm
Control	Focus	Manual
	Iris	Manual
Distortion	4/3"	-0.52%@y=11.5mm
	1"	-0.42%@y=8.0mm
	1/2"	-0.12%@y=4.0mm
Focusing Range		0.2m~∞
Filter Thread		M46×P0.75
Weight		207g
Operating Temp.		-20℃ ~+60℃

PMS-LFHHG-3520M(B)

PRODUCT DIMENSIONS

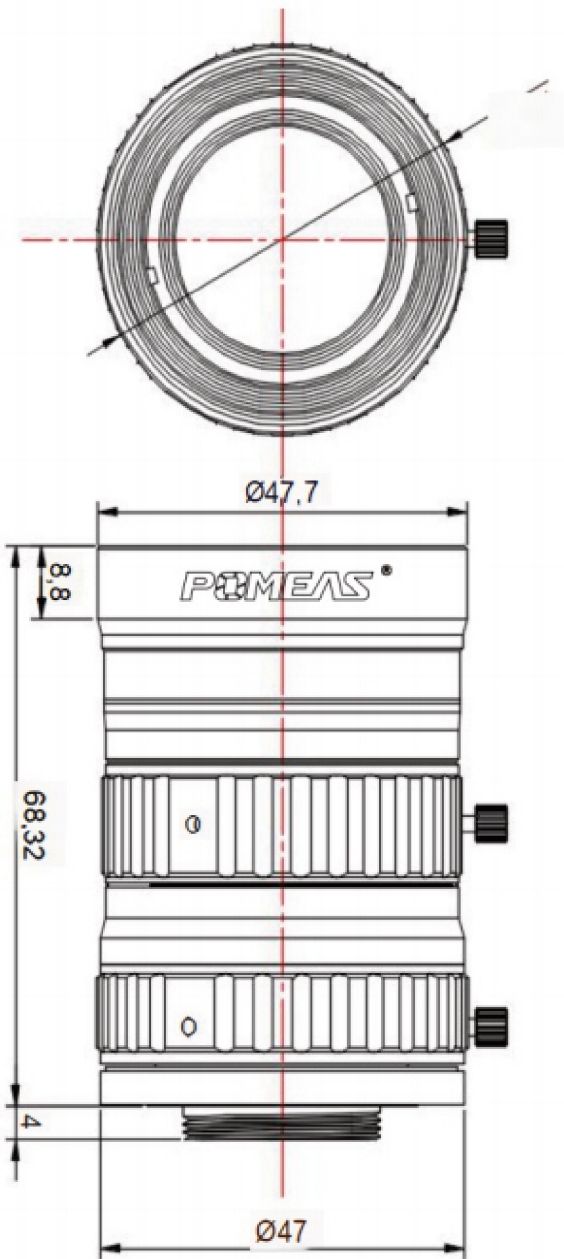

Unit: mm	Model	PMS-LFHHG-3520M(B)
 	Name	FA Lens
	Date	2019/11/2
		

