



PMS-LFHHG-5020M(B)

FA INDUSTRIAL LENS

Professional optical design with low distortion and uniform center-to-edge illumination.

PRODUCT OVERVIEW

- ◆ Supports up to 20MP 1.1-inch cameras
- ◆ Focus and iris locking screws maintain stable settings
- ◆ Low-distortion imaging
- ◆ Compact structure with excellent optical performance


PMS-LFHHG-5020M(B)


PRODUCT SPECIFICATIONS

Image Sensor Size		4/3" (23mm)
Spectral Range		420~1000nm
Focal Length		50mm
Mount		C-Mount
Iris Range		F2.0-F22
Field Angle (D x H x V)	4/3"	26.0°×21.0°×15.8°
	1"	18.3°×14.7°×11.1°
	1/2"	9.2°×7.3°×5.6°
Object Size at MOD (D x H x V)	4/3"	118.9×95.1×71.3mm
	1"	82.7×66.1×49.6mm
	1/2"	41.4×33.1×24.9mm
Back Focal Length (in air)		20mm
Control	Focus	Manual
	Iris	Manual
Distortion	4/3"	-0.13%@y=11.5mm
	1"	-0.05%@y=8.0mm
	1/2"	-0.01%@y=4.0mm
Focusing Range		0.3m~∞
Filter Thread		M46×P0.75
Weight		219g
Operating Temp.		-20°C~+60°C

PMS-LFHHG-5020M(B)

PRODUCT DIMENSIONS

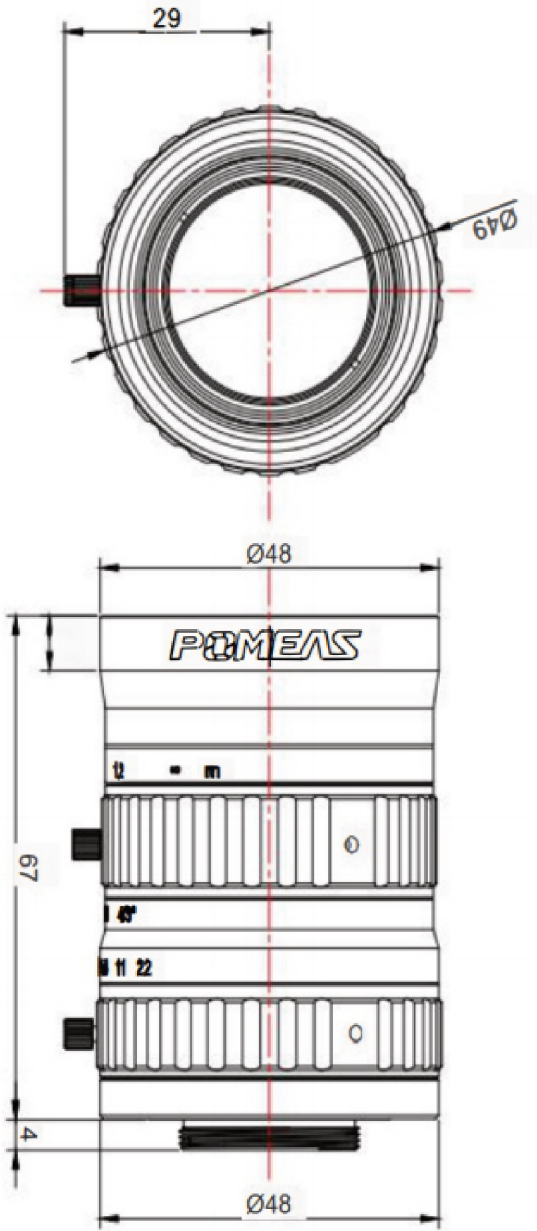

Unit: mm	Model	PMS-LFHHG-5020M(B)
	Name	FA Lens
	Date	2019/11/2
		

